


REV.	REVISION NOTE	DATE	CHECKED

We recommended this from 105/05

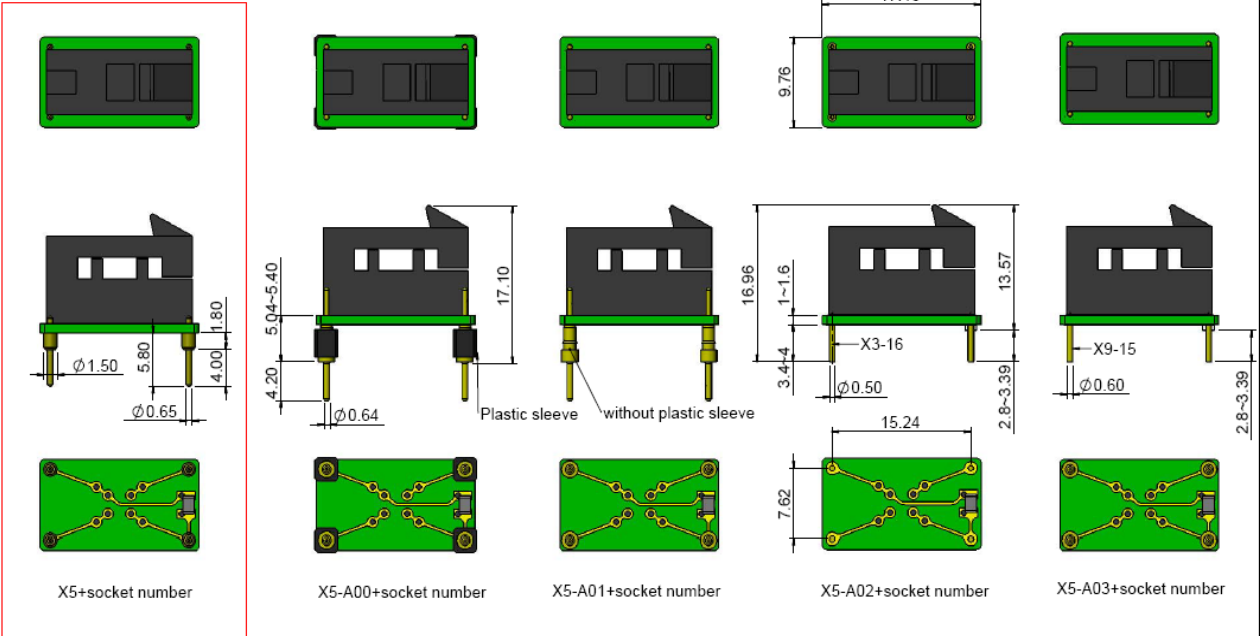

**Note:**

1. PCB thickness is from 1.0 to 1.6mm.
2. Currently, we use four types pin for different application.
  - X5-A00, lead (Brass) diameter is 0.64mm, length 4mm with plastic sleeve.
  - X5-A01, lead (Brass) diameter is 0.64mm, length 4mm without plastic sleeve.
  - X5-A02, lead (Bronze) diameter is 0.5mm, effective length 3.4~4mm.
  - X5-A03, lead (SCM415) diameter is 0.6mm, effective length 3.4~4mm.
  - X5, lead (Bronze) diameter is 0.65mm, effective length 4mm.

 <small>           XXX: ±0.05            XX: ±0.03            X: ±0.02            .X: ±0.01            .XX: ±0.006            ANGLE: ±14°            DRILL HOLE: H6/S6/d         </small>	<b>TITLE</b> Interposed board	<b>AFORCE</b>	
	<b>DWG NO.</b> X5-XXX+socket no.	<b>REV.</b> B	優力精密工業有限公司
	<b>MATERIAL</b>	<b>PAPER</b> A4	TEL: 886-3-6571238
	<b>UNIT:</b> mm	<b>SCALE:</b> 2:1	<b>SHEET:</b> 1 of 1
<b>APPROVAL</b>	<b>DATE</b>	<b>DESIGNER</b>	<b>DATE</b>
Steven Yang	16/05/25		
		FAX: 886-2-81926187	